



- Two-way door adjustment
- Pre-mounted running system allows for minimal installation time
- Integrated soft opening and soft closing to prevent door slam
- Doors slide smoothly and quietly, and sit flush when in the closed position

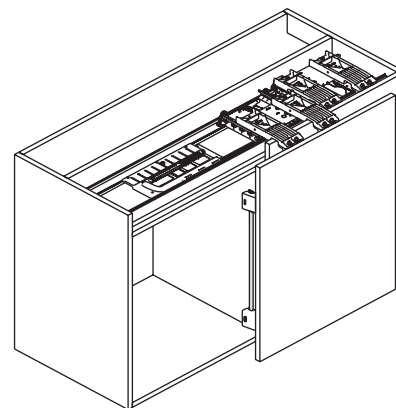

For internal cabinet width	Item No.
1200-1399 (3' 11 1/4" - 4' 7 1/16")	406.02.080
1400-1599 (4' 7 1/8" - 5' 2 15/16")	406.02.081
1600-1799 (5' 3" - 5' 10 13/16")	406.02.082
1800-1999 (5' 10 7/8" - 6' 6 11/16")	406.02.083
2000-2199 (6' 6 3/4" - 7' 2 9/16")	406.02.084
2200-2400 (7' 2 5/8" - 7' 10 1/2")	406.02.085

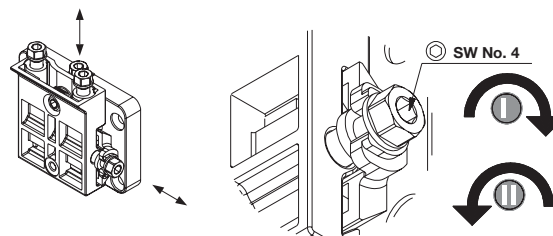

Door Width	TB
Middle Panel Thickness	MW
Internal Cabinet Width	KIM
Cabinet Height	KH
Side Panel Thickness	SW
External Cabinet Width	KAM
Door Recess Side Panel	A
Top Panel Thickness	C
Door Height	TH
Height	H

Dimensional data not binding. We reserve the right to alter specifications without notice.