

## Planofit For Wood Doors

Door thickness from: 16 mm (5/8")

Door height: max. 2650 mm (104 5/16")

- Adds rigidity and prevents warping and twisting
- Can be installed in new doors or retrofitted into existing doors
- Can be used to straighten warped doors
- Installation of two fittings per door is recommended
- Not recommended for hardwoods



## Planofit Set

Material: Threaded rod: Steel, galvanized

Tensioner: Zinc alloy, bright

Trim strip, Cover caps and Retaining plate: Plastic

Color	Item No.
black	407.90.201
white	407.90.701

## Supplied With

Threaded Rod – 2195 mm (86 7/16")

Trim strip – 2138 mm (84 3/16")

2 Tensioners

Square nut

Hexagon nut

2 Cover caps (for open-type tensioner and closed-type tensioner)

4 Retaining plates


2 Lock washers

## Note

Order 2 sets per door.

The threaded rod as well as the trim strip are shortened proportionally, depending on the door height, to change the distance between the hole centers.

10 mm open-ended wrench is needed for adjustment.

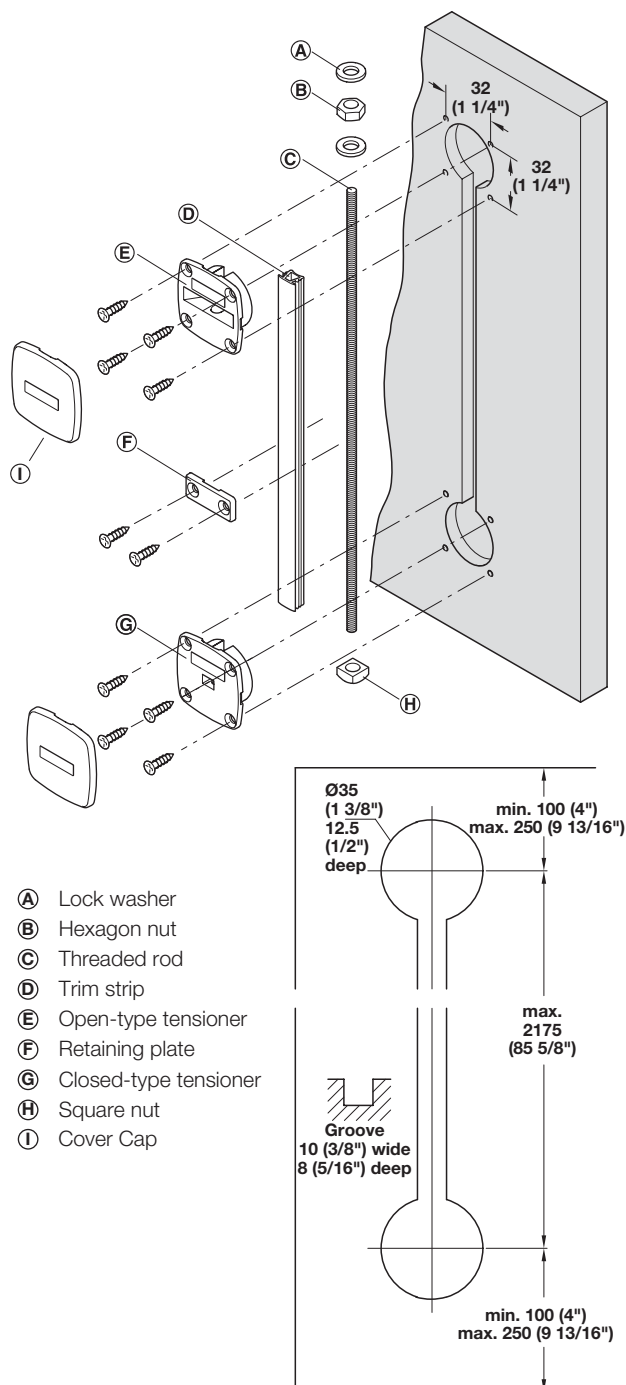

- A Lock washer
- B Hexagon nut
- C Threaded rod
- D Trim strip
- E Open-type tensioner
- F Retaining plate
- G Closed-type tensioner
- H Square nut
- I Cover Cap