




**TRADEMARK  
HARDWARE**

WORLD OF QUALITY HARDWARE

# Installation Guide

## 5050B-17'

### Self Adhesive Silicone Seal UL Tested and Certified for Fire and Smoke Doors



- \* Seals against smoke, fire, air, sound and weather
- \* Unaffected by sunlight, ozone and ultraviolet rays
- \* Excellent compression; door latches easily

#### Installation Instructions

1. The surface temperature of the frame must be above 50° F. for the adhesive to bond.
2. Clean frame with clean wipe provided to remove dust, oil, grease and dirt. Wax coated or high gloss painted surfaces may require roughening of the surface with a scotch brite pad or sandpaper so adhesive will properly bond.
3. Measure and pre-cut pieces to fit the head and jambs.
4. Remove protective backing 1 to 2 feet at a time.
5. Position on frame where illustrated, allowing approximately 1/16" between seal and frame for clearance when compressed.
6. Adhere by pressing firmly (approx. 15 lbs. pressure required) straight down along entire length of gasketing. Do not remove and relocate.

**WARNING:** Do not rub along length from one end toward other end during installation as gasket will stretch and not adhere properly.

7. Make sure the seal does not impede proper closing and latching of the door.



**NGP-EDGE**, Sealing System (Category G) for use on category B wood type fire doors rated up to 20 minutes, single swing up to 4'0" x 8'0" and pairs up to 8'0" x 8'0"




POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1-1/2 HOURS. CATEGORY H  
FOR APPLICATION TO CATEGORY B WOOD-TYPE FIRE DOORS RATED UP TO 20 MIN. CATEGORY G, H

Smoke & draft control gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC for use on "S" label doors. 2.15



**Made in USA**

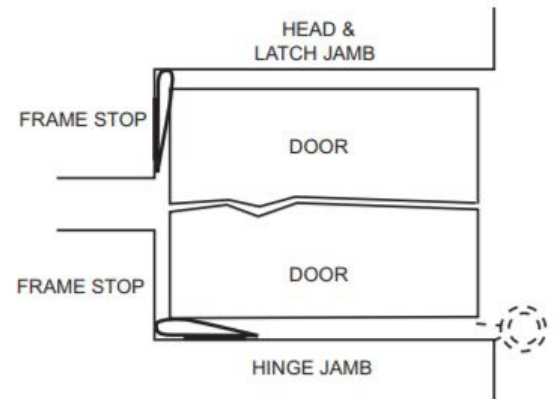

#### **STORAGE AND SHELF LIFE**

The adhesive on this seal has a shelf life of one year stored at 75°F and 50% relative humidity or less

# SKU: N5050



www.tmhardware.com



845-388-1300



845-388-1388



sales@tmhardware.com