

## EKU Clipo 36 H Inslide

Maximum door weight: 36 kg (79 lbs.)




Maximum door height: 2200 mm (7' 2 5/8")

Maximum door width: 1000 mm (3' 3 3/8")


Door thickness: 19 mm – 25 mm (3/4" – 1")

Height adjustment: +/-2 mm (1/16")


- Running gear: four plastic rollers
- Optional soft close mechanism can be inconspicuously integrated into the track so it is not visible and is protected from damage
- Rattle-free floor guide
- No guide rails in the bottom of the cabinet
- Tool-less clip-on hardware allows for quick and easy door mounting

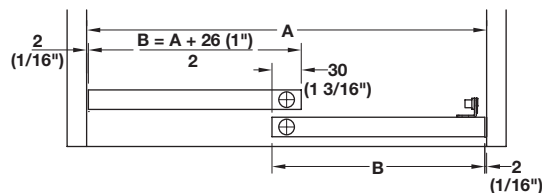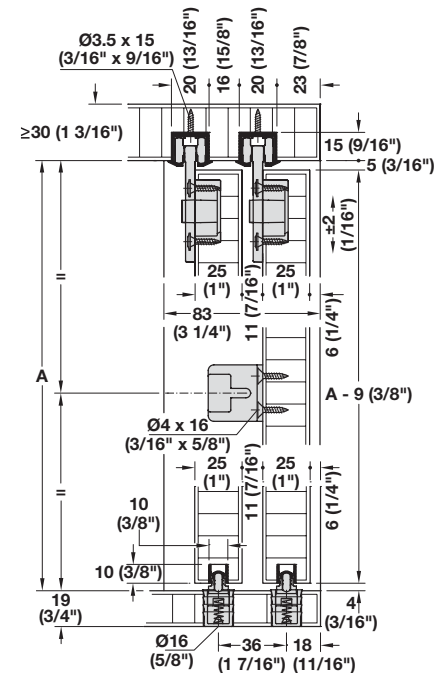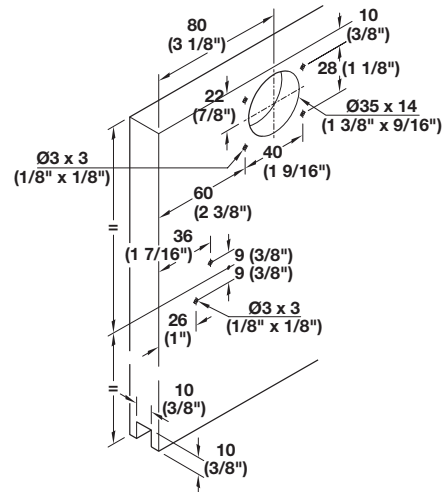

## Soft Close Mounting




Door with one Soft Close mechanism.



Door with two Soft Close mechanisms.

**Dimensions in mm**  
**Inches are approximate**

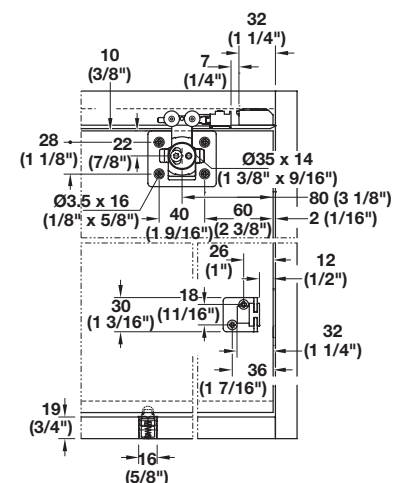

Dimensional data not binding. We reserve the right to alter specifications without notice.






## EKU Clipo 36 H Inside Set

	Item No.
For 2 sliding doors	405.02.404





### Note

The complete set is always delivered without upper track, lower guide channel, soft close mechanism and service port, please order separately.

### Set Components

	Description	Material	Finish/Color	Qty.
	Running gear	Plastic	anthracite	4 pcs.
	Housing, for screw mounting	Plastic	anthracite	4 pcs.
	Track stopper, for upper track	Plastic	gray	4 pcs.
	Guide, for mounting in drilled holes	Plastic	anthracite	2 pcs.
	Soft stop, for screw mounting to the back of the front door	Plastic	gray	1 set

### Individual Components

	Description	Material	Finish/Color	Length	For Door Weights	Item No.
	Upper track, pre-drilled, for screw mounting	Aluminum	anodized silver	2.5 m (8' 2 7/16")	-	405.00.622
				3.5 m (11' 5 13/16")	-	405.00.623
	Lower guide channel, for glue mounting	Aluminum	mill finish	2.5 m (8' 2 7/16")	-	405.04.251
				3.5 m (11' 5 13/16")	-	405.04.351
	Soft Close mechanism, optional for screw mounting to housing  One set includes two mechanisms. Two sets are required for dual soft closing of two doors.	Plastic	gray	-	up to 33 lbs.	405.10.073
					34 - 57 lbs.	405.10.074
					57 - 79 lbs.	940.48.045
	Service port for upper track (to access running gear after installation)	Plastic	gray	-	-	405.00.072